

34-01/B4C-AKNB

Features

- . High Flux Output.
- . Low Profile.
- . Low Thermal Resistance.
- . Low Power Consumption.
- .The product itself will remain within RoHS compliant version.
- . ESD-withstand voltage: up to 4KV.



Descriptions

This revolutionary package design allows the light designer to reduce the number of LEDs required and provide a more uniform and unique illuminated appearance than with other LED solutions. This is possible through the efficient optical package design and high-current capabilities.

The low profile package can be easily coupled with reflectors or lenses to efficiently distribute light and provide the desired light appearance.

Applications

- . Automotive Exterior Lighting
- . Electronic Signs and Signals
- . Channel Letter
- . Special Lighting application

Device Selection Guide

D. D	C		
PART NO.	Material	Emitted Color	Lens Color
34-01/B4C-AKNB	InGaN	Blue	Water Clear

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 1 of 7

Device number: DLE-304-037 Established date: 04-29-2007 Established by: Jim Lin


Revision : 1 Release Date:2008-09-20 00:15:51.0


LifecyclePhase:正式發行 Expired Period: Forever



34-01/B4C-AKNB

Package Dimensions



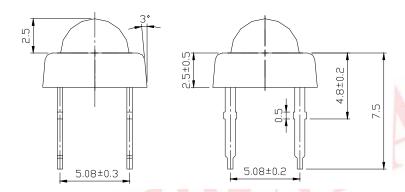

Notes: 1.All dimensions are in millimeters

- 2.An epoxy meniscus may extend about 1.5mm(0.059") down the leads
- 3. Tolerances unless dimensions ±0.25mm

Absolute Maximum Ratings (Ta=25

Parameter	Symbol	Rating	Units
Continuous Forward Current	I_{F}	30	mA
Peak Forward Current(Duty 1/10 @ 1KHZ)	I_{FP}	100	mA
Reverse Voltage	V_R	5	V
Operating Temperature	T_{opr}	-40 ~ +85	
Storage Temperature	T_{stg}	-40 ~ +100	
Soldering Temperature(T=5 sec)	T_{sol}	260 ± 5	
Power Dissipation	P_d	100	mW
Zener Reverse Current	Iz	100	mA
Electrostatic Discharge	ESD	4K	V

Everlight Electronics Co., Ltd.

http:\\www.everlight.com

Rev. 1

Page: 2 of 7

Device number: DLE-304-037

Established date: 04-29-2007

Established by: Jim Lin Release Date:2008-09-20 00:15:51.0

: 1 LifecyclePhase:正式發行

Revision

Expired Period: Forever



34-01/B4C-AKNB

Electro-Optical Characteristics (Ta=25

Parameter	Symbol	Min.	Тур.	Max.	Condition	Unit
Total Flux	V	1125	1800	2850	I _F =30mA	mlm
Viewing Angle	2 1/2		70		I _F =30mA	deg
Peak Wavelength	p		468		I _F =30mA	Nm
Dominant Wavelength	d	464	470	476	I _F =30mA	Nm
Spectrum Radiation Bandwidth			35		I _F =30mA	nm
Forward Voltage	VF	3.0	3.5	4.0	I _F =30mA	V
Reverse Current	IR			10	V _R =5V	uA
Zener Reverse Voltage	Vz	5.2			Iz=5mA	V

Rank

34-01/B4C-AKNB

	(1) VF(V)	-1	(2) d		(3) v(mlm)			
Bin.	Min.	Max.	Bin.	Min.	Max.	Bin.	Min.	Max.
1	3.00	3.20	3	464	468	K	1125	1425
2	3.20	3.40	4	468	472	L	1425	1800
3	3.40	3.60	5	472	476	M	1800	2250
4	3.60	3.80				N	2250	2850
5	3.80	4 00						

^{*}Measurement Uncertainty of Forward Voltage: ±0.1V

Everlight Electronics Co., Ltd.

Device number: DLE-304-037

http:\\www.everlight.com

Rev. 1

Page: 3 of 7

Established date: 04-29-2007 Established by: Jim Lin

Expired Period: Forever

Release Date:2008-09-20 00:15:51.0

: 1 LifecyclePhase:正式發行

Revision

^{*}Measurement Uncertainty of Luminous Intensity: ±15%

^{*}Measurement Uncertainty of Dominant Wavelength ±1.0nm




34-01/B4C-AKNB

Typical Electro-Optical Characteristics Curves


Relative Intensity vs. Wavelength


1.00 RELATIVE INTENSITY 0.50 0.00 425 450 475 550 WAVELENGTH (nm)


Forward Current vs. Forward Voltage




Relative Intensity vs. Forward Current










Relative Intensity vs. Displacement Angle



Everlight Electronics Co., Ltd.

Device number: DLE-304-037

Revision : 1

LifecyclePhase:正式發行

http://www.everlight.com

Rev. 1

Page: 4 of 7

Established date: 04-29-2007

Established by: Jim Lin

Release Date:2008-09-20 00:15:51.0

Expired Period: Forever




34-01/B4C-AKNB

Packing Quantity Specification


- (1) 60 pcs/1 tube, 20 tubes/1 small inside box, 12 small inside boxes/1 outside box
- (2) 60 pcs/1 tube, 80 tubes/1 big inside box, 4 big inside boxes/1 outside box

Label Form Specification

(1) Tube Label Form



(2)Box Label Form



PART NO: Everlgiht's Production Number

QTY: Packing Quantity LOT NO: Lot Number

CAT: Ranks of Forward Voltage, Dominant Wavelength and Total Flux

CPN: Customer's Production Number

P/N: Production Number

HUE: Reference REF: Reference

MADE IN TAIWAN: Production Place

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 5 of 7

Device number: DLE-304-037 Established date: 04-29-2007 Established by: Jim Lin

Revision : 1 Release Date:2008-09-20 00:15:51.0


LifecyclePhase:正式發行 Expired Period: Forever



34-01/B4C-AKNB

Notes

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.
- 4. Below the zener reference voltage Vz, all the current flows through LED and as the voltage rises to Vz, the zener diode "breakdown." If the voltage tries to rise above Vz current flows through the zener branch to keep the voltage at exactly Vz.
- 5. When the LED is connected using serial circuit, if either piece of LED is no light up but current can't flow through causing others to light down. In new design, the LED is parallel with zener diode. if either piece of LED is no light up but current can flow through causing others to light.

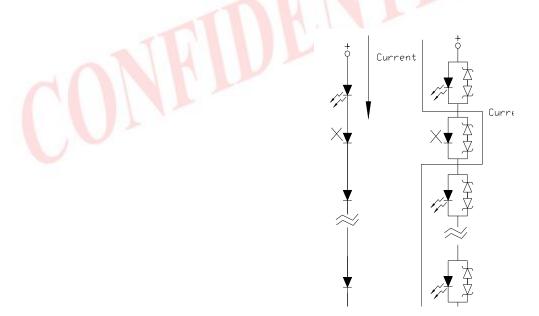

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 6 of 7

Expired Period: Forever

Device number: DLE-304-037 Established date: 04-29-2007 Established by: Jim Lin

Revision : 1 Release Date:2008-09-20 00:15:51.0

LifecyclePhase:正式發行



34-01/B4C-AKNB

6. Soldering Condition

Careful attention should be paid during soldering. When soldering, leave more then 3mm from solder joint to case, and soldering beyond the base of the tie bar is recommended.

Avoiding applying any stress to the lead frame while the LEDs are at high temperature particularly when soldering.

Recommended soldering conditions:

Hand Soldering		DIP Soldering		
Temp. at tip of iron	400 Max. (30W Max.)	Preheat temp.	100 Max. (60 sec Max.)	
Soldering time	3 sec Max.	Bath temp.	265 Max.	
Distance	3mm Min.(From solder joint	Bath time.	5 sec Max.	
	to case)			
		Distance	3mm Min.	



EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http:\\www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 7 of 7

Device number: DLE-304-037 Established date: 04-29-2007 Established by: Jim Lin

Revision : 1 Release Date:2008-09-20 00:15:51.0

LifecyclePhase:正式發行 Expired Period: Forever