

34-01/T4C-4PRB

Features

- . High Flux Output.
- . Low Profile.
- . Low Thermal Resistance.
- . Low Power Consumption
- . The phosphor filled in the reflector converts the blue emission of InGaN chip to ideal white.
- .Typical chromaticity coordinates x=0.30, y=0.29 according to CIE1931
- .The product itself will remain within RoHS compliant version.
- . ESD-withstand voltage: up to 4KV



Descriptions

This revolutionary package design allows the light designer to reduce the number of LEDs required and provide a more uniform and unique illuminated appearance than with other LED solutions. This is possible through the efficient optical package design and high-current capabilities.

The low profile package can be easily coupled with reflectors or lenses to efficiently distribute light and provide the desired light appearance.

Applications

- . Automotive Lighting
- . Electronic Signs and Signals
- . Special Lighting application

Device Selection Guide

D. D	Cł		
PART NO.	Material	Emitted Color	Lens Color
34-01/T4C-4PRB	InGaN	White	Water Clear


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 1 of 8

Device Number: DLE-304-034 Establish date: 03-05-2007 Establish by: Jim Lin



34-01/T4C-4PRB

Package Dimensions

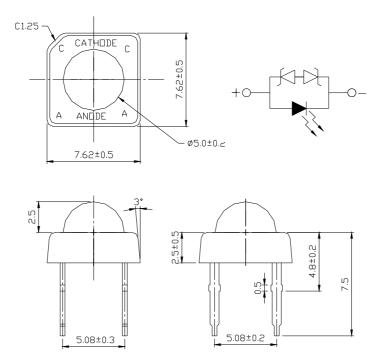

Notes: 1.All dimensions are in millimeters

- 2.An epoxy meniscus may extend about 1.5mm(0.059") down the leads
- 3. Tolerances unless dimensions ±0.25mm

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Units
Continuous Forward Current	I_{F}	30	mA
Peak Forward Current(Duty 1/10 @ 1KHZ)	I_{FP}	100	mA
Reverse Voltage	V_R	5	V
Operating Temperature	$T_{ m opr}$	-40 ~ +85	$^{\circ}\!\mathbb{C}$
Storage Temperature	$T_{ m stg}$	-40 ~ +100	$^{\circ}\!\mathbb{C}$
Soldering Temperature(Time=5 sec)	T_{sol}	260 ± 5	$^{\circ}\!\mathbb{C}$
Power Dissipation	P _d	120	mW
Electrostatic Discharge	ESD	4000	V

Everlight Electronics Co., Ltd.

http:\\www.everlight.com

Rev. 1

Page: 2 of 8

Device Number: DLE-304-034

Establish date: 03-05-2007

Establish by: Jim Lin



34-01/T4C-4PRB

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Condition	Unit
Forward Voltage	VF	3.0	3.6	4.0	I _F =30mA	V
Reverse Current	IR			10	V _R =5V	mA
Total Flux	Фу	2850	4000	5650	I _F =30mA	mlm
Viewing Angle	2 0 1/2		65		I _F =30mA	deg
Chromaticity	X		0.30		I 20 A	
Coordinates	у		0.29		I _F =30mA	
Zener Reverse Voltage	Vz	5.2			Iz=5mA	V

Rank

34-01/T4C-4PRB (1) (2)

	(1) VF(V)		(2) Color		$(3)\Phi v(mlm)$			
Bin.	Min.	Max.	Bin.	Min.	Max.	Bin.	Min.	Max.
1	3.00	3.20	A0			P	2850	3600
2	3.20	3.40	В5			Q	3600	4500
3	3.40	3.60	В6			R	4500	5650
4	3.60	3.80						
5	3.80	4.00						

Everlight Electronics Co., Ltd. Device Number :DLE-304-034

http:\\www.everlight.com Establish date: 03-05-2007

Establish by: Jim Lin

Page: 3 of 8

Rev. 1


^{*}Measurement Uncertainty of Forward Voltage: ±0.1V

^{*}Measurement Uncertainty of Luminous Intensity: ±15%



34-01/T4C-4PRB

CIE Chromaticity Diagram

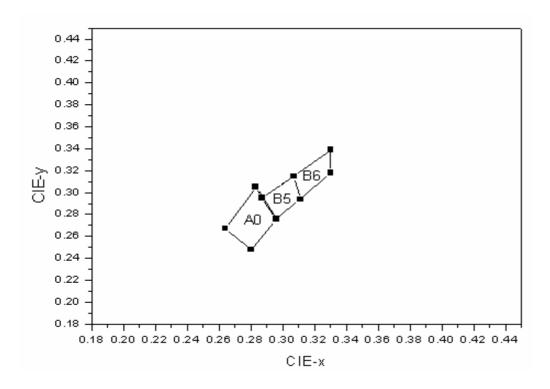

Color Ranks (IF=30mA, $Ta=25^{\circ}C$)

Color Ranks		CIE Rank			
A 0	X	0.280	0.264	0.283	0.296
A0	Y	0.248	0.267	0.305	0.276
D.5	X	0.296	0.287	0.307	0.311
B5	Y	0.276	0.295	0.315	0.294
D.C	X	0.311	0.307	0.330	0.330
В6	Y	0.294	0.315	0.339	0.318

^{*}Measurement uncertainty of the color coordinates: ±0.01

Everlight Electronics Co., Ltd. Device Number: DLE-304-034

http:\\www.everlight.com

Establish date: 03-05-2007

Rev. 1

Page: 4 of 8


Establish by: Jim Lin




34-01/T4C-4PRB


Typical Electro-Optical Characteristics Curves

Relative Intensity vs. Wavelength







Chromaticity Coordinate vs. Forward Current




Forward Current vs. Forward Voltage



Forward Current vs. Ambient Temp.



Radiation Characteristics



Everlight Electronics Co., Ltd.

Device Number: DLE-304-034

http:\\www.everlight.com

Establish date: 03-05-2007

Rev. 1

Page: 5 of 8

Establish by: Jim Lin



34-01/T4C-4PRB

Packing Quantity Specification

- (1) 60 pcs/1 tube, 30 tubes/1 small inside box, 12 small inside boxes/1 outside box
- (2) 60 pcs/1 tube, 105 tubes/1 big inside box, 4 big inside boxes/1 outside box

Label Form Specification

(1)Tube Label Form

EVERLIGHT	PART NO: 34-01/T4C-4PRB	QTY: 60
EVERCIONT	LOT NO:	CAT:

(2)Box Label Form

EVERLIGHT	
CPN:	_
P/N: 	
QTY:	CAT:
	HUE:
LOT NO : 	REF:
MADE IN TAIWAN	I

PART NO: Everlgiht's Production Number

QTY: Packing Quantity LOT NO: Lot Number

CAT: Ranks of Forward Voltage, Color Bin Grade and Total Flux

CPN: Customer's Production Number

P/N: Production Number

HUE: Reference REF: Reference

MADE IN TAIWAN: Production Place

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 6 of 8


Device Number :DLE-304-034 Establish date: 03-05-2007 Establish by: Jim Lin



34-01/T4C-4PRB

Notes

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.
- 4. Below the zener reference voltage Vz, all the current flows through LED and as the voltage rises to Vz, the zener diode "breakdown." If the voltage tries to rise above Vz current flows through the zener branch to keep the voltage at exactly Vz.
- 5. When the LED is connected using serial circuit, if either piece of LED is no light up but current can't flow through causing others to light down. In new design, the LED is parallel with zener diode, if either piece of LED is no light up but current can flow through causing others to light.



Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 7 of 8

Device Number: DLE-304-034 Establish date: 03-05-2007 Establish by: Jim Lin



34-01/T4C-4PRB

6. Soldering Condition

Careful attention should be paid during soldering. When soldering, leave more then 3mm from solder joint to case, and soldering beyond the base of the tie bar is recommended.

Avoiding applying any stress to the lead frame while the LEDs are at high temperature particularly when soldering.

Recommended soldering conditions:

Hand Soldering		DIP Soldering	
Temp. at tip of iron	400°C Max. (30W Max.)	Preheat temp.	100°C Max. (60 sec Max.)
Soldering time	3 sec Max.	Bath temp.	265 Max.
Distance	3mm Min.(From solder joint	Bath time.	5 sec Max.
	to case)		
		Distance	3mm Min.

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http:\\www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 8 of 8

Device Number :DLE-304-034 Establish date: 03-05-2007 Establish by: Jim Lin